

Delock External USB Type-C™ 20 Gbps Combo Enclosure for M.2 NVMe PCIe or SATA SSD - tool free

Description

This enclosure by Delock enables the installation of an **M.2 PCIe NVMe SSD or SATA M.2 SSD** in 2280, 2260, 2242 and 2230 format. It can be connected via USB to the PC or laptop.

Combo enclosure

The big advantage of this Delock M.2 enclosure is that both SATA and PCIe (NVMe) M.2 SSDs can be inserted into the enclosure. The **memory is automatically recognized by the chipset** and can then be used.

SSD installation without tools

The special feature of this enclosure is that **no tools are required** to install the M.2 SSD. The SSD is inserted into the slot and attached to the board with a rubber nipple.



Item no. 42031

EAN: 4043619420315

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
external:
1 x USB 20 Gbps USB Type-C™ female
internal:
1 x M.2 key M slot
- Chipset: Realtek RTL9220
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on SATA or PCIe (NVMe)
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports NVM Express (NVMe)
- Bootable
- Data transfer rate up to 20 Gbps
- LED indicator for power and access
- Housing material: aluminium / plastic
- Dimensions (LxWxH): ca. 115 x 32 x 13 mm
- Hot Plug, Plug & Play


System requirements

- Android 13.0 or above
- Chrome OS
- Linux Kernel 6.2 or above
- Mac OS 12.4 or above
- Windows 10/10-64/11
- iPad Air (4th Generation) or above
- iPad Pro (3rd Generation) or above
- Surface Pro 7
- Device with a free USB Type-C™ port or with a free Thunderbolt™ 3 or Thunderbolt™ 4 port

Package content

- External enclosure M.2
- Cable USB-C™ male to USB-C™ male, length ca. 20 cm
- User manual

Images

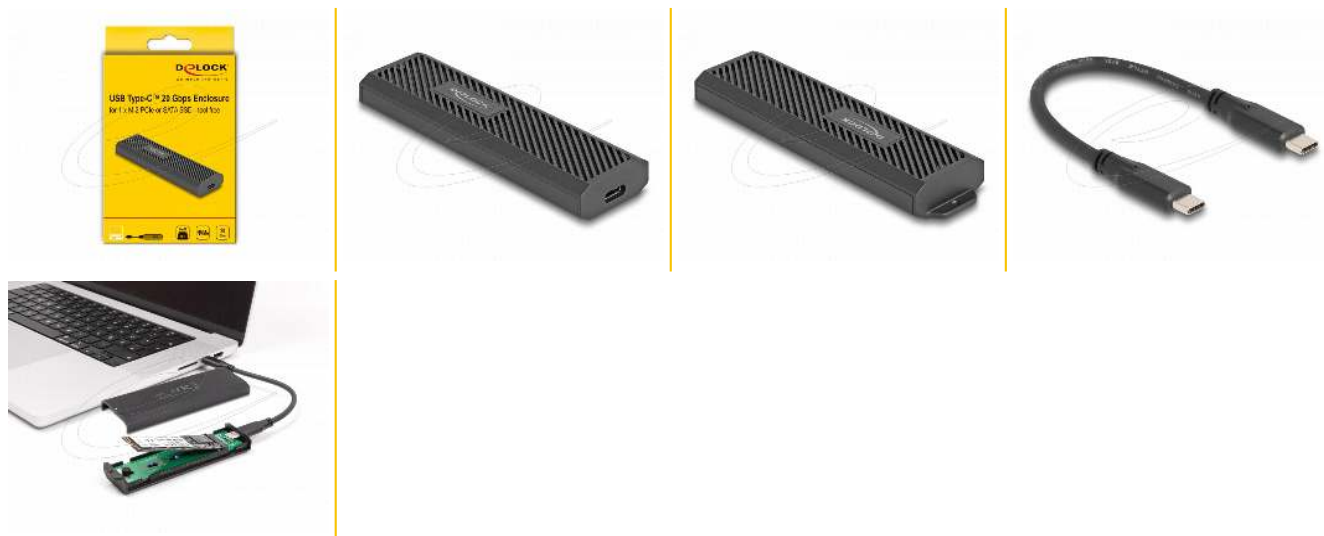

General

Function:	Hot Plug Plug & Play bootable
Supported operating system:	Chrome OS Surface Pro 7 Windows 10 32-Bit Windows 10 64-Bit iPad Pro (3rd Generation) or above iPad Air (4th Generation) or above Windows 11 Mac OS 12.4 oder höher Linux Kernel 6.2 or above Android 13.0 or above
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on SATA or PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

External:	1 x USB 20 Gbps USB Type-C™ female
Internal:	1 x M.2 key M slot

Technical characteristics

Chipset:	Realtek RTL9220
Data transfer rate:	20 Gbps

Physical characteristics

Housing material:	Plastic metal
Cable length:	20 cm

Length:	115 mm
Width:	32 mm
Height:	13 mm
Colour:	black

Manufacturer information

Street	Beeskowdamm 13/15
Postal code	14167
City	Berlin
Country	Deutschland
E-Mail	info@delock.de
Website	www.delock.de